





















FT-SDS NCF(R)

Furutech's Ultimate Performance SCHUKO Distributor Sockets


Rhodium Plated Non-magnetic conductors (Type: 2-pole+earth; Rating: 16A 250V A.C.)

Nano Crystal² Formula - Nano Crystalline, Ceramic and Carbon Powder

Incorporated into select Furutech products, Nano Crystal² Formula --- NCF is comprised of a special crystalline material that has two "active" properties. First, it generates negative ions that eliminate static and secondly, it converts thermal energy into far-infrared. Furutech then combines this remarkable crystalline material with nano-sized ceramic particles and carbon powder for their additional "Piezo Effect" damping properties. The resulting Nano Crystal² Formula is the ultimate electrical and mechanical damping material - only found in Furutech products!

Features

- α (Alpha) Pure Copper main Conductor (t: 0.5mm)
- Insulation Materials: Nylon/fiberglass with special "NCF" anti-resonance damping material nano-sized crystalline, piezo ceramic particles and carbon powder
- 1.0mm thick Zinc/steel brace plate Base Bracket
- Specified for wire diameters of 2.8mm or 5.5 Sq.mm/10AWG Max. (set screw)
- Dimensions: 54.8mm (L) x 54.8mm (W) x 52.0mm(H)
- Furutech's total attention to detail and build quality extends right down to a specially designed patent-pending pressure plate (see below) that increases the contact area of the Alpha Conductors.

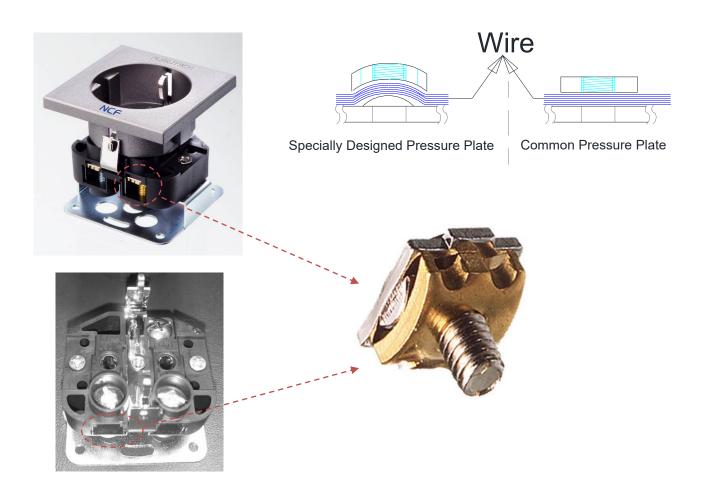

All metallic parts are treated with the

*FURUTECH ${\mathcal U}$ (Alpha) Process (Super Cryogenic & Demagnetizing Treatment.)

FURUTECH CO., LTD service@furutech.com

Make A More Powerful Connection with Furutech!

Product name	Product Introduction
FT-SDS NCF(R)	High End Performance SCHUKO Distributor Socket